



# Highlights & Data Sheet

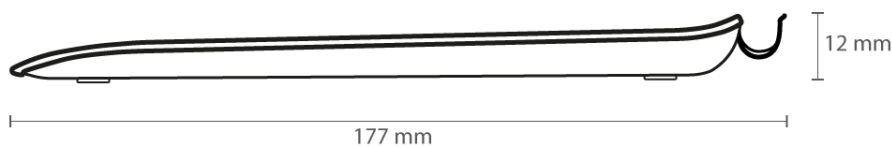

## HIGHLIGHTS

- Monochrome 4,5" (11,4 cm) TFT with optional backlight.
- Extremely robust hardened sensor surface made of special glass (8H) with ER-technology.
- Flat, light and cost-efficient build for stationary and mobile usage.
- Unique RSA-signature creation and RSA-encryption methods inside the pad.
- Battery-free pen with changeable pen tip.
- Signature capturing with 500 Hz 4D samples and 1.024 pressure stages (x, y, z, t).
- Compatible with all currently available Windows- and Linux- systems.
- Compatible with Windows Remote Desktop and Citrix ICA environments.
- Secure Mode to display the signature on the screen in real-time.
- Delivery comes with completely assembled USB cable, pen and cord.
- Including free of charge software packages.

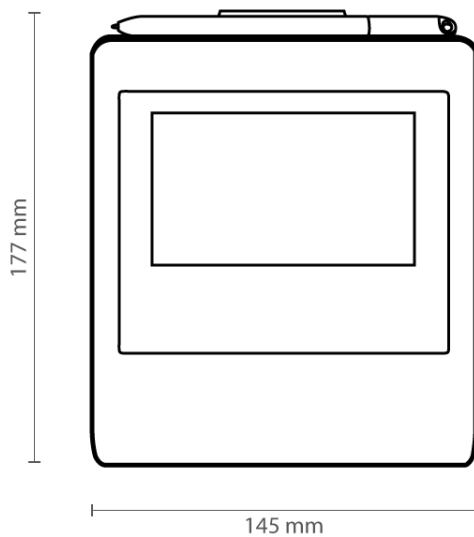

# TECHNICAL DATA

## General data

|                   |  |
|-------------------|--|
| Dimensions        | 145 x 177 x 12 mm (W x D x H)  |
| Casing colours    | Upper shell: RAL 7021, black-grey<br>Lower shell: RAL 9010, pure white   |
| Cable port        | USB  |
| Cable length      | Approx. 2,7 meters   |
| Power consumption | Standby-status: 5 mA (HID/WinUSB) and 2 mA (FTDI)<br>Consumption with LCD-Backlight: 75 mA<br>Consumption without LCD-Backlight: 165 mA. |
| Power supply      | USB  |
| Status-LED        | 2 coloured and freely programmable LEDs  |
| Stand             | Mounting stand on the backside, compatible Multigrip™ plate available  |
| Weight            | Approx. 240 grams (incl. cable)  |
| Warranty          | 2 years, optional extension up to 5 years.   |
| Country of origin | Germany  |

## Display

|                            |  |
|----------------------------|--|
| Type                       | Monochrome TFT   |
| Size                       | 4,5" (11,4 cm)   |
| Colour space               | Monochrome   |
| Backlight                  | Optional, brightness: 150 cd/m <sup>2</sup>                        |
| Configuration of backlight | The backlight can be configured with an API or configuration file. |
| Resolution                 | 320 x 200 pixels $\pm$ 84 x 84 ppi                                 |
| Pixel size                 | 0,285 mm   |
| Visible area               | 97 x 61 mm   |
| Line of sight              | 6 o'clock  |
| Scroll-function            | No   |

## Sensor

|                            |   |
|----------------------------|---|
| Type                       | ERT (Electronic Resonance Technology)                                   |
| Active signing area        | 96 x 60 mm  |
| Resolution                 | 9.598 x 5.998 pixels $\pm$ 2.487 x 2.499 ppi                            |
| Linearity                  | $\pm$ 0,4 mm  |
| Method of input            | Special sensor for pen input (no influence by hand touch).              |
| Surface                    | Extremely durable, hardened special (anti-glare) glass.                 |
| Surface hardness           | 8H  |
| Life expectancy            | Approx. 30 million signatures   |
| Pressure stages            | 1.024 pressure stages   |
| Output rate of coordinates | 500 Hz 4D-samples (consisting of x, y coordinates, time and pressure)   |
| Internal sampling rate     | 6.000 samples per second  |
| Stability of output rate   | Constant through integrated quartz                                      |
| Pen                        | Active and battery-free pen with changeable pen tips.                   |
| Minimal pressure force     | 0.098 N (10 gf)   |
| Maximal pressure force     | 7.845 N (800 gf)  |
| Life expectancy of the pen | Approx. 1,2 million signatures at 250 grams pressure and 2,5 cm length. |
| Pen tilt angle             | +/- 45°   |

|                            |   |
|----------------------------|---|
| Possible height of the pen | 5 - 15 mm   |
| Pen attachment             | Highly flexible textile-cord and horizontal pen holder. |

### Connection types

|                     |  |
|---------------------|--|
| USB                 | USB-HID and WinUSB   |
| Serial              | Optional with internal USB-Serial-Converter (VCOM-Port) using FTDI or chargeable VCOM-Port-Driver. |
| USB-Standby-Support | Yes, if the corresponding signal is given, the device switches off.                                |
| Ethernet            | Yes, with an optionally available USB-to-Ethernet adapter.   |

### Driver and software

|               |   |
|---------------|---|
| Driver        | No special driver is required for a USB connection.   |
| Plug and Play | Yes, available for all connection types.              |
| SDK (API)     | Several SDKs including updates and support available. |
| Tools         | Tools free of charge including updates and support.   |
| Software      | Further chargeable software available.                |

### System environment

|                            |   |
|----------------------------|---|
| Operating System           | Windows 7 and newer, Windows Server 2012 and newer, 32- and 64-Bit, Linux |
| Terminal Server and Citrix | <a href="#">Compatible with Windows Remote Desktop and Citrix ICA</a>     |
| Citrix Virtual Channel     | <a href="#">Optionally available</a>                                      |

### Security mechanisms

|                                      |  |
|--------------------------------------|--|
| Data transfer                        | AES-256 encrypted data transfer between host and pad via RSA key exchange.   |
| Encryption                           | RSA-Encryption unit inside the pad.  |
| Firmware                             | Flash memory is protected against data theft.  |
| Secure Mode                          | Real-time display of the signature without usable biometrics.  |
| Signature unit                       | RSA signature creation unit in the pad.  |
| Key storage                          | Creation and storage of certificates in the pad.   |
| Key size                             | 4096 Bit   |
| Certificate Signing Request (CSR)    | CSR can be generated in the pad and extracted.   |
| Trusted certificates                 | The CSR can be signed by a root authority.<br>Additional information: <a href="#">eIDAS Pad Signature Seal</a>     |
| Supported Hash-algorithms            | SHA-1, SHA-256 and SHA-512   |
| Signature-Performance                | Transmission and Signing of a SHA-256 Hash via WinUSB:<br>2048 Bit: 800 ms; 3072 Bit: 2.300 ms; 4096 Bit: 5.200 ms |
| signotec „Content-Signing“           | No   |
| Protection against forceful break in | The casing can be glued optionally.  |

### Miscellaneous

|                              |  |
|------------------------------|--|
| Transport protection         | No   |
| Individualization            | Change of casing colour and logo print (on request). |
| Slideshow                    | The standby image is freely configurable.            |
| Certifications and standards | CE, FCC, DIN EN 55032, DIN EN 55024, EN 62368-1)     |
| RoHS                         | RoHS-compliant according to EU-regulations.          |

|  |   |
|--|---|
| WEEE-Reg.-No. (German register for used devices) | DE 41995888   |
| Packaging law Reg.-No.:                          | DE 3470684644700  |
| Serial number                                    | Unique and retrievable, internal serial number.   |
| Device label                                     | There is a label on the packaging and the device with information regarding the article number, hardware revision and serial number, including a barcode. |

### Operating and storage conditions

|  |                        |
|--|------------------------|
| Operating temperature                  | -10°C to +60°C         |
| Storage temperature                    | -25°C to +70°C         |
| Air humidity for operation and storage | <= 90%, non-condensing |
| Air pressure for operation and storage | > 700 hPa              |
| Degree of protection                   | IP 52                  |

### Reliability / Quality assurance

|   |  |
|---|--|
| Quality test                            | Individual testing of devices with test log.                               |
| High temperature test of the components | 240 hours at 80°C  |
| Low temperature test of the components  | 240 hours at - 40°C  |
| Humidity test of the components         | 240 hours at 60°C and 90% humidity   |
| Thermal shock test of the components    | 30 minutes at – 40°C and directly 30 minutes at + 80°C (10x in succession) |

### Article numbers

|                              |   |
|------------------------------|---|
| <b>Without</b> LCD-Backlight |   |
| ST-ZMERT-3-U100              | signotec Zeta with USB and approx. 2,7 m USB-cable  |
| ST-ZMERT-3-FT100             | signotec Zeta with virtual COM-Port via USB and approx. 2,7 m USB-cable (USB 2serial)           |
| <b>With</b> LCD-Backlight    |   |
| ST-ZBERT-3-U100              | signotec Zeta Backlight with USB and approx. 2,7 m USB-cable                                    |
| ST-ZBERT-3-FT100             | signotec Zeta Backlight with virtual COM-Port via USB and approx. 2,7 m USB-cable (USB 2serial) |

### Copyright

Copyright © 2000 - 2022 signotec GmbH

All rights reserved. This documentation and the components described therein are copyrighted products of signotec GmbH Ratingen in Germany. Partial or full reproduction is only permitted with the written consent of signotec GmbH. All hardware and software names used are trade names and / or trademarks of the respective manufacturers / owners. Subject to changes at any time. We accept no liability for errors in the documentation.